


MMU-16LE SmartMonitor Program Card

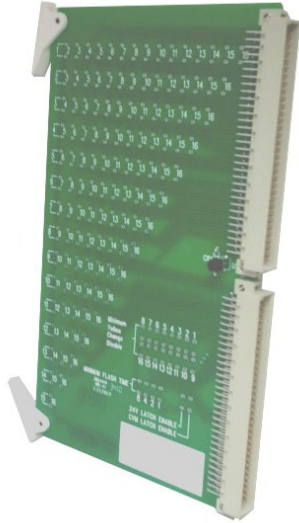

The MMU-16LE *SmartMonitor*[®] Program Card is compatible with any MMU meeting the requirements of Nema TS2-2003, including the MMU-16E, MMU-16LE(ip), and MMU2-16LE(ip) models.

In addition to standard NEMA TS-2 MMU functionality, the MMU-16LE Program Card provides an on-board non-volatile memory device that is used to store enhanced MMU-16LE *SmartMonitor*[®] configuration data.

STANDARD FEATURES

| | |
|-------------------------|---|
| Connector: | Twin 96 pin DIN connectors compatible with any MMU meeting the requirements of Nema TS2-2003 |
| Programmable Functions: | Permissive Matrix Minimum Flash Minimum Yellow Change Disable 24V & CVM Latch Enable Program Card Ajar Test |
| Program Card Memory: | The MMU-16LE <i>SmartMonitor</i> [®] memory feature is supported. |
| Dimensions: | PCB Height: 7.75 inches PCB Width: 4.50 inches |

EBERLE DESIGN INC.

3510 East Atlanta Avenue
Phoenix, AZ 85040 USA
www.EDIttraffic.com

Tel (480) 968-6407
Fax (602) 437-1996

